



Technical Service Bulletin

SUBJECT:			No: TSB-19-52B-001
UPDATES TO REMOVAL & INSTALLATION OF SEAT BELTS WITH PRE-TENSIONER - SMR			DATE: February 2019
			MODEL: See below
CIRCULATE TO:	<input type="checkbox"/> GENERAL MANAGER	<input checked="" type="checkbox"/> PARTS MANAGER	<input checked="" type="checkbox"/> TECHNICIAN
<input checked="" type="checkbox"/> SERVICE ADVISOR	<input checked="" type="checkbox"/> SERVICE MANAGER	<input type="checkbox"/> WARRANTY PROCESSOR	<input type="checkbox"/> SALES MANAGER

PURPOSE

This TSB updates the Interior & Supplemental Restraint (SRS) section of the affected Service Manuals to update the Removal and Installation procedure of seat belts with pre-tensioner (seat belt anchor adjuster has been added).

AFFECTED VEHICLES

- 2014, 2015, 2017 Mirage
- 2017 Mirage G4


AFFECTED SERVICE MANUALS

- 2014, 2015, 2017 Mirage Service Manual, Group 52-Interior & Supplemental Restraint (SRS)
- 2017 Mirage G4 Service Manual, Group 52-Interior & Supplemental Restraint (SRS)



Please make the indicated changes below to the 2014, 2015, 2017 Mirage and 2017 Mirage G4 Service Manuals, Group 52-Interior & Supplemental Restraint (SRS) -> 52B-Supplemental Restraint System (SRS) -> Seat Belts with Pre-Tensioner -> Removal and Installation:

<Incorrect>

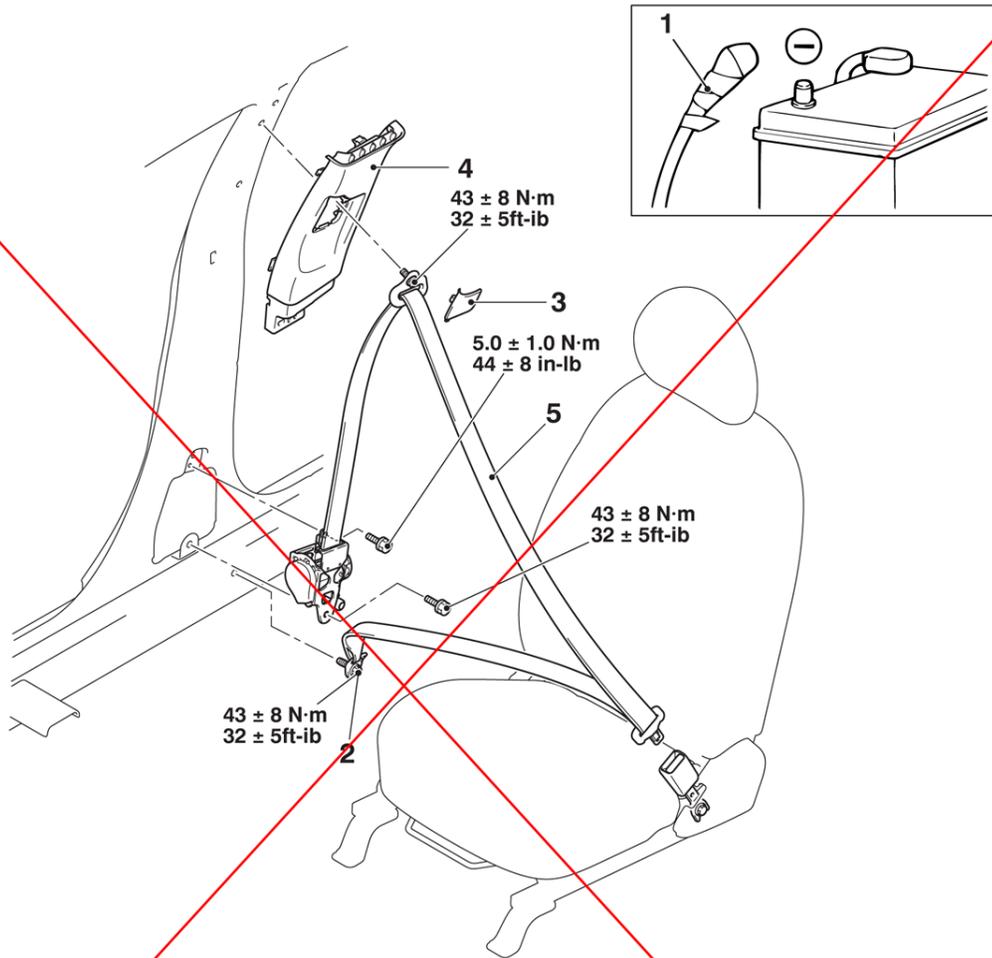

ACB03614AB

<<A>>

Removal steps

1. Negative (-) battery cable
 - Front scuff plate, scuff plate rear, center pillar trim lower (Refer to GROUP 52A – Interior Trim).
2. Outer seat belt mounting bolt
3. Center pillar trim upper cap
4. Center pillar trim upper (Refer to GROUP 52A – Interior Trim .)
5. Seat belt with pre-tensioner

<>

>>A<<


Installation steps

- Pre-installation inspection
- 5. Seat belt with pre-tensioner
- 4. Center pillar trim upper (Refer to GROUP 52A – Interior Trim).
- 3. Center pillar trim upper cap
- 2. Outer seat belt mounting bolt
 - Front scuff plate, scuff plate rear, center pillar trim lower (Refer to GROUP 52A – Interior Trim).
- 1. Negative (-) battery cable
- Post-installation inspection

>>B<<

↑
See next page

<Correct>

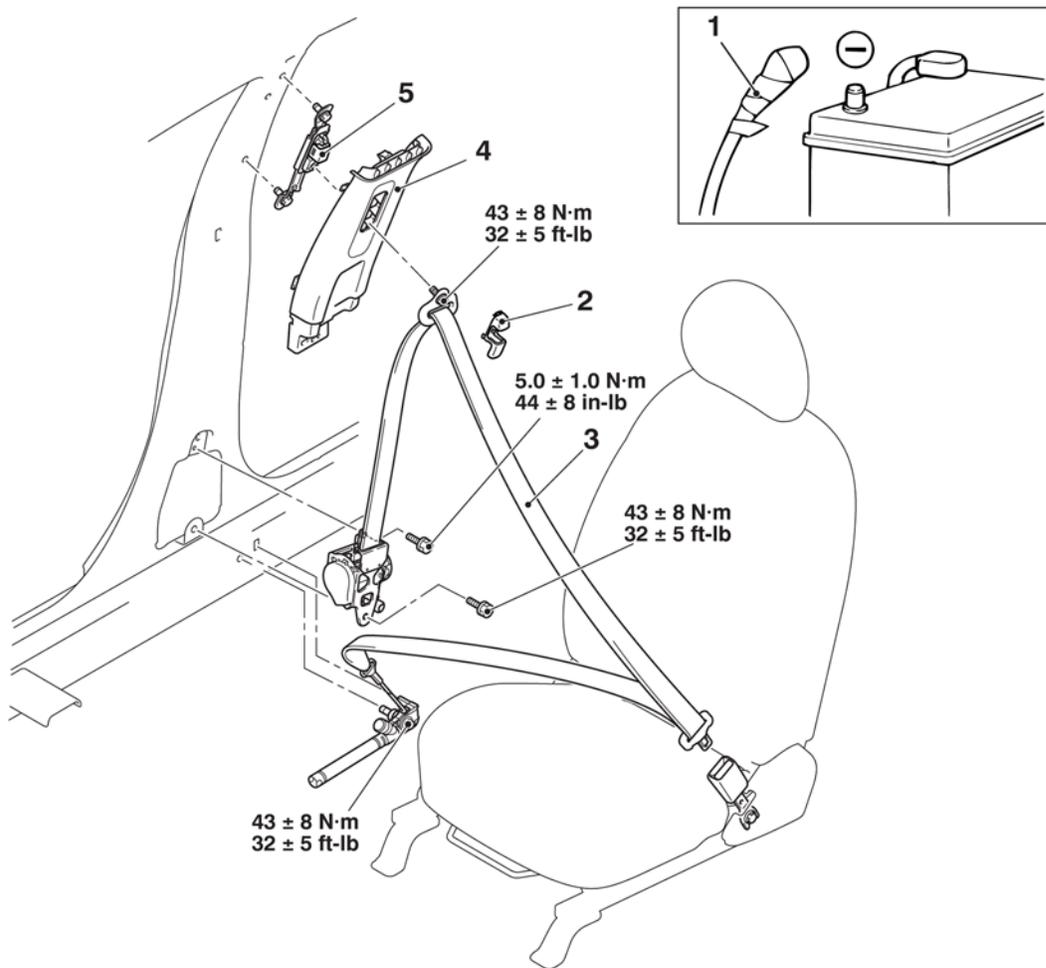

ACH00803AD

- <<A>>
- Removal steps**
1. Negative (-) battery cable
 - Front scuff plate, scuff plate rear, center pillar trim lower (Refer to GROUP 52A – Interior Trim).
- <>
2. Front seat belt sash cover
 3. Seat belt with pre-tensioner
 4. Center pillar trim upper (Refer to GROUP 52A – Interior Trim .)
 5. Front seat belt anchor adjuster

- >>A<<
- Installation steps**
- Pre-installation inspection
 - 5. Front seat belt anchor adjuster
 - 4. Center pillar trim upper (Refer to GROUP 52A – Interior Trim).
 - 3. Seat belt with pre-tensioner
 - 2. Front seat belt sash cover
 - Front scuff plate, scuff plate rear, center pillar trim lower (Refer to GROUP 52A – Interior Trim).
- >>B<<
1. Negative (-) battery cable
 - Post-installation inspection